



DAPcons® Medium Porcelain Stoneware
CICOGRES

ENVIRONMENTAL PRODUCT DECLARATION

DAPcons®.002.020



IN ACCORDANCE WITH STANDARDS
ISO 14.025 and UNE EN 15804 + A1

PRODUCT

Medium Porcelain Stoneware

COMPANY



PRODUCT DESCRIPTION

The product covered is Medium Porcelain Stoneware that includes several models of Porcelain Stoneware.

PCR REFERENCE

RCP002 - Productos de revestimiento
cerámico - V.2 (2015)

PRODUCTION PLANT

CICOGRES, S.A.
Ctra Vilafamés-Pobla Tornesa, s/n
12192 - Vilafamés (Castellón) Spain

VALIDITY





From: 30/11/2017
To: 30/11/2022

The validity of DAPcons® 002.020 is subject to the conditions of DAPcons® regulations. The relevant version of this DAPcons® is included in the register kept by the CAATEEB; for more information, consult the Program Operator's website: www.csostenible.net





Environmental Product Declaration: Medium Porcelain Stoneware Executive Summary

<p>PROGRAM OPERATOR DAP®construcció</p> <p>Environmental product declarations in the construction sector www.csostenible.net</p>	
<p>ADMINISTRATOR OF THE PROGRAM OPERATOR</p> <p>Col·legi d'Aparelladors, Arquitectes Tècnics i Enginyers d'Edificació (CAATEEB) C. Bon Pastor, 5, 08021 Barcelona www.apabcn.cat</p>	
<p>HOLDER OF THE DECLARATION</p> <p>CICOGRES S.A. Ctra Vilafamés-Pobla Tornesa, s/n 12192 - Vilafamés (Castellón) - Spain</p>	
<p>DECLARATION CARRIED OUT BY:</p> <p>ReMa-INGENIERÍA, S.L. Calle Crevillente 1, entlo, 12005 - Castellón - Spain</p>	
DECLARATION NUMBER	DAPcons®.002.020
PRODUCT DECLARED	Medium Porcelain Stoneware
<p>PRODUCT DESCRIPTION</p> <p>The product in question is a Medium Porcelain Stoneware that includes several models of Porcelain Stoneware. The variability of Life Cycle Inventory Assessment (LCIA) results doesn't exceed 10%.</p>	
REGISTRATION DATE	30/11/2017
<p>VALIDITY</p> <p>This verified declaration authorises the holder to use the DAPcons® eco-label logo. The declaration is applicable exclusively to the product in question and for five years as of the date of registration. CICOGRES is responsible for the information contained in this declaration.</p>	
<p>ENDORSED BY CAATEEB</p> <p>Mr. Jordi Gosalves i López, President of the CAATEEB</p>   <p>COL·LEGI D'APARELLADORS, ARQUITECTES TÈCNICS I ENGINYERS D'EDIFICACIÓ DE BARCELONA</p>	<p>ENDORSED BY AUTHORISED VERIFIER</p> <p>Mr. Ferran Pérez, Verifier accredited by the Program Operator DAPconstruction®</p>  
<p>This environmental product declaration complies with standards ISO 14025 and UNE EN 15804 + A1 and contains information of an environmental nature about the life cycle of Medium Porcelain Stoneware manufactured by CICOGRES at its plant in Villafamés, Castellón, Spain. This declaration is based on the document RCP 002 Productos de revestimiento cerámico - Versión 2 - 2015.09.18. The environmental product declaration (DAPcons®) may not be comparable to another EPD if it is not based on the UNE EN 15804 + A1 standard</p>	

Environmental Product Declaration: Medium Porcelain Stoneware

1. Description of the product and its use

The product covered is Medium Porcelain Stoneware that includes several models of porcelain stoneware whose variability of Life Cycle Inventory Assessment (LCIA) results doesn't exceed 10%.

It includes the following water absorption groups:

- Group BIa: dry-pressed tiles with a rate of water absorption $E \leq 0,5\%$.

Average weight: 22,10 kg/m²

The main recommended use for this product is to tile floors and/or clad walls and façades, both exterior and interior.



Picture 1. Porcelain Stoneware ceramic tile

2. Description of the life cycle phases

PRODUCT STAGE		CONSTRUCTION PROCESS STAGE			USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE LIFE SYSTEM BOUNDARY
Raw materials supply	Manufacturing	Product Transport	Construction - Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy use	Operational water use	Decomstruction and demollition	Transport	Waste processing	Disposal	Reuse, recovery, recycling potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	NDM	X	NDM	NDM	NDM	NDM	NDM	NDM	X	X	X	NDM

X = Declared module

NDM = Not Declared Module

2.1. Manufacture (A1, A2 and A3)

Raw materials (A1 and A2)

The Medium Porcelain Stoneware basically consists of clay, sand and feldspar with an enamel layer mainly comprising feldspar, carbonate, silicate and kaolin, amongst others.

The raw materials used have different origins (provincial, national, Turkey, Ukraine, Italy or the United Kingdom). This variation is due to the inability to obtain these materials from a single source. The raw materials from outside Spain are transported by freighter to the port of Castellón and then by truck to the plants. For marine transport, a transoceanic freighter was chosen, with transport distance differing according to the source (Turkey, UK, Ukraine). All raw materials are transported by bulk, i.e. they do not require any packaging materials.

Manufacture (A3)

The CICOGRES plant has several providers for the spray-dried powder. The process of treatment and manufacture is very similar for all the providers.

Once the raw materials are at the spraying plant, they are unloaded and placed in hoppers at the production plants, from which they are sent to storage silos. Before its use, the raw materials are mechanically ground by a hammer mill to get them loose.

Once the mix is made, it is subjected to the processes of milling (or grinding) and then spraying. This stage of the production process serves to produce a homogeneous mixture of the various components with a given particle size and prepares it for moulding the tiles. The size of the particles of the raw materials mixture has a significant influence on the plasticity and, therefore, also on the formation of the ceramic tile, on the drying speed of the tiles and on the contact surface between the particles, which affects the reactivity between the pieces and many of the physicochemical properties of the finished product, that is, porosity, mechanical resistance, etc. A wet milling is carried out because it provides a higher uniformity of the formula components, a smaller size of the particles, a better control of the process variables and better properties for the press powder than a dry milling would offer.

The barbotine resulting from the wet milling of the raw materials is dried by a continuous and automatic process which allows obtaining particle-hollow spherical agglomerations called atomized granules, with a controlled amount of moisture (approximately 5 to 6% on weight) and ideal shape and size to flow at the next stage of the process. The resulting product is called atomized powder, and dry-spraying is the name of the process in which it is used. As for the companies providing the spraying, they use a process of cogeneration of heat and electrical energy for the spray-dryer. The cogeneration process generates electricity using residual heat produced by combustion used, in part, in the spray-drying process, thereby reducing the electrical requirements.

Once the spray-drying is completed, the resulting material is sent by bulk from the spray-dried powder providers' premises to the CICOGRES factory. Once at the plant, the spray-dried powder or clay is unloaded into storage hoppers and afterwards it is distributed amongst the silos.

Later on, the spray-dried clay is sent to the press through a sieve. As flat tiles have an easy shape (rectangular, square, etc.) and hold a small thickness-surface ratio, its moulding is carried out by one-way dry pressing with single-acting press, where only one of the surfaces of the piece receives pressure. This process is carried out by a hydraulic press.

The freshly-moulded pieces are introduced in a drying system similar to a wheel with a given lap-time according to each product in order to reduce its moisture, doubling or tripling its mechanical resistance, which allows a later processing. The tiles leaving the drying plant are covered by one or more glazing layers by using bell-shaped glaze application.

Once the glazing is completed, the pieces are sent to decoration. At this stage, the patterns and designs are applied on the pieces, mainly using the digital printing machine.

After that the pieces already glazed and decorated are sent to the kiln. The firing is the most important stage of the production process of ceramic tiles, as this is when the previously moulded tiles undergo a fundamental modification of their properties.

Once fired, some tiles are sent to classification, whereas others are sent to the squaring process to meet the client requirements. The dry squaring consists of some burrs or discs that polish the edges to meet the allowed size standards.

Finally, the tiles are packaged using cardboard, pallets and polyethylene. Once the pallet is made up, it is stored in the logistics area of the plant.

To reduce atmospheric emissions, bag filters and wet filters are used, comprising a textile membrane that is permeable to gases but retains the dust. It is placed on the surface and the interior of the fabric and as soon as the surface layer is formed, it becomes the main filtering mean.

At the company, waste water resulting from glazing preparations and line cleaning is kept and transported to the atomizer, where it is reincorporated to the production process of spray-dried clay.

Water may be lost by evaporation or by being retained in the product (before ultimately evaporating). To make up for this loss, well water is brought in for the production process

2.2. Construction

Transporting the product (A4)

The main destination of the Medium Porcelain Stoneware manufactured by CICOGRES is Spain, then USA, Mexico, South Africa, Lebanon and Ireland.

According to the data provided by CICOGRES, there are three transport scenarios for the finished products:

Table 1. Scenarios for transport of the product to the place of installation.			
Destination	Type of transport	Percentage (%)	Average kilometers
Spain	27 t truck	39	390
Europe	27 t truck	20	860
	Freighter		1.700
Rest of the world	27 t truck	41	570
	Transoceanic freighter		7.700
<i>Total</i>		100	100

The truck used meets the Euro III standards, consumes 1,25E-05 kg of diesel / kg of cargo and km.

For transcontinental transport, medium-sized transoceanic freighters are considered appropriate.

Process of installing the product and construction (A5)

Once the product is unpacked, it can be installed. According to the data obtained and with a view to applying a real scenario, it is established that installation calls for the use of adhesive mortar (CaSO₄). Tile adhesives are cement-based adhesives comprising a mixture of hydraulic binders, mineral fillers and organic additives, mixed with water or added liquid just before use. They consist of a mixture of white or grey cement, siliceous and/or limestone mineral fillers and organic additives, water retainers, water redispersible polymers, rheology modifiers, fibres, etc.

2.3. Use of product

The use phase is divided into the following modules:

- Use (B1)
- Maintenance (B2)
- Repair (B3)
- Replacement (B4)
- Rehabilitation (B5)
- Use of operational energy (B6)
- Use of operational water (B7)

Once installed, the Medium Porcelain Stoneware product requires no further energy input for use, nor does it call for maintenance, except normal cleaning operations. For this reason, of all the modules listed above, only the environmental impacts attributable to product maintenance are applicable (module B2).

According to CICOGRES, the life cycle of the reference product is the same as that of the building in which it is used. Provided that it is correctly installed, it is a lasting and difficult to Access product. Therefore, it is not easy to replace.

- Maintenance (B2)

The product should be cleaned with a damp cloth. If the surface is dirty or greasy, cleaning agents such as detergents or bleach may be added. This study considers the consumption of water and disinfectant for a scenario of residential use.

Scenario 1: residential use – 0.03 kg of detergent and 5 l of water are used to wash 50 m² of tiles, once a week.

Cleaning products	Scenario 1
Water (kg/wash)	0.1
Detergent (kg/wash)	0.0006
Frequency of washing (num. of times)	1

2.4. End of life

The end-of-life phase includes the following modules:

Deconstruction and demolition (C1)

Once it reaches the end of its life cycle, the product will be removed, either in the framework of rehabilitation of the building or during its demolition. In the case of the demolition of a building, the impacts attributable to the removal of the product are negligible.

Transport (C2)

The product waste is transported by truck in compliance with Euro III norms, to its destination at a distance of 50 km. In this estimation of the 50 km between the demolished building and the closest landfill site, only the Spanish market has been taken into account, extrapolating the results to the overall ceramics market. At present, Spain has over 80 authorized CDW sites. However, these landfill sites are mostly concentrated in certain areas such as Catalonia (55%), Galicia (12%) and Andalusia (11%). The main Spanish cities are expected to have an installation of this kind nearby.

Waste management for reuse, recovery and recycling (C3)

At present, in Spain there is no specific basic legislation on the production and management of waste produced by construction and demolition (CDW). Therefore it is covered by Basic Law 10/1998 on waste. The most usual type of treatment of CDW in Spain is to place it in a landfill site (83%), and the rest is recycled. This is the scenario applied in this report; 17% of the product is recycled.

Disposal (C4)

83% of the product is sent to a landfill site.

2.5. Module D: benefits and potential environmental burdens derived from activities of reuse, recovery and recycling

It is considered that impacts are avoided in the installation (waste of packaging such as cardboard, plastic and pallets) and at the end of the product life.

3. Life cycle assessment

The life cycle assessment on which this declaration is based was carried out in keeping with ISO standards 14040 and 14044 and the document RCP 002 Productos de revestimiento cerámico Version 2 – 2015.09.18.

This LCA is “**cradle to grave**”, that is, it covers the phases of manufacture of the product, construction, use and end of life.

Specific data from the CICOGRES plant in Villafamés, Castellón, Spain corresponding to the year 2016 has been used to inventory the manufacturing phase. For the rest of the phases, generic data has been used, taken mostly from the official database of the DAPconstrucción® Program Operator and the ELCD database.

3.1. Functional unit

The functional unit is “**1 m² of flooring of a dwelling with Medium Porcelain Stoneware for 50 years of residential use in a geographic and technological environment of Spain in the year 2017**”.

3.2. System boundaries

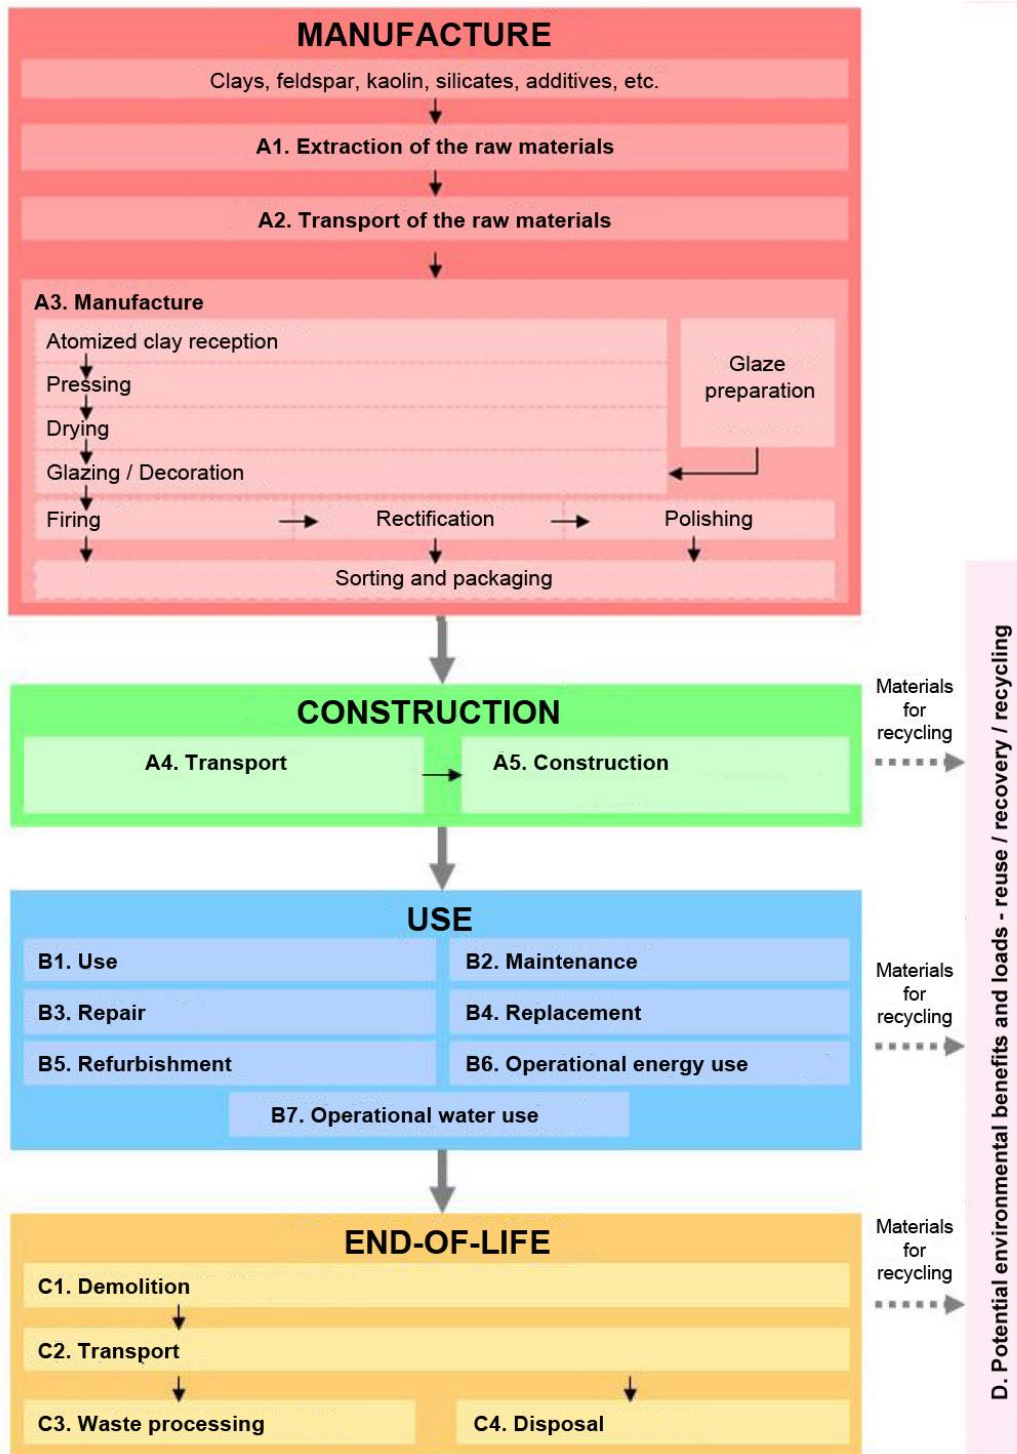


Figure 1. System boundaries

3.3. Indicators of impact evaluation

Table 3. Indicators of environmental impact										
Parameter	Unit per m ² of panel	Life Cycle Phase								
		Construction			Use			End Of Life		
		A4.	A5.	B1.	B2.	B3 – B7	C1.	C2.	C3.	C4.
Abiotic Resources Depletion Potential (Elements)	Kg of Sb eq.	4,88E-06	6,95E-07	NDM	1,16E-05	MND	MND	4,85E-09	3,47E-09	1,24E-07
Abiotic Resources Depletion Potential (Fossil fuels)	MJ, net calorific value	178,32	8,53	NDM	21,36	MND	MND	1,38	0,17	2,80
Acidification Potential	Kg of SO ₂ eq.	5,37E-02	2,11E-03	NDM	1,27E-02	MND	MND	6,35E-04	1,22E-04	8,72E-04
Ozone Depletion Potential	Kg of CFC11 eq.	2,14E-06	1,70E-08	NDM	3,34E-07	MND	MND	1,58E-08	1,66E-09	2,89E-08
Global Warming Potential	kg of CO ₂ eq.	9,77	0,47	NDM	2,75	MND	MND	0,10	0,01	0,10
Eutrophication Potential	Kg of PO ₄ -3 eq.	6,71E-03	7,20E-04	NDM	8,47E-03	MND	MND	1,10E-04	6,93E-06	1,55E-04
Photochemical Ozone Formation Potential	kg of C2H4 eq.	2,02E-03	1,40E-04	NDM	2,32E-03	MND	MND	1,40E-05	5,74E-06	3,67E-05

C1. Deconstruction and demolition
C2. Transport
C3. Waste management for reuse, recovery and recycling
C4. Disposal

B1. Use
B2. Maintenance
B3. Repair
B4. Replacement
B5. Refurbishment
B6. Operational energy use
B7. Operational water use

MND. Non Declared Module

4. Life cycle inventory data (LCI)

Table 4. Parameters of resource use												
Parameter	Unit per m ² of panel	Life Cycle Phase							End Of Life			
		Manufacture		Construction			Use					
		A1. - A3.	A4.	A5.	B1.	B2.	B3.-B7.	C1.		C2.	C3.	C4.
Use of renewable Total use of renewable primary energy resources, PERT material, PERE	MJ	5,76E+00	1,81E-01	8,98E-01	MND	5,20E+00	MND	MND	MND	3,84E-03	1,91E-02	6,73E-02
Total use of non-renewable primary energy resources, PENRT	MJ	1,77E+02	1,61E+01	8,45E+00	MND	3,41E+01	MND	MND	MND	1,50E+00	2,06E-01	3,01E+00
Use of renewable secondary fuels, RSF	MJ	0,00E+00	0,00E+00	0,00E+00	MND	0,00E+00	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00
Use of non-renewable secondary fuels, NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	MND	0,00E+00	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water, FW	m3	6,16E-02	1,61E-03	9,10E-03	MND	7,14E-01	MND	MND	MND	1,24E-04	3,93E-05	3,03E-03
Waste production												
Hazardous waste disposed, HWD	kg	1,76E-04	5,85E-06	1,44E-05	MND	3,35E-05	MND	MND	MND	3,49E-07	1,00E-07	1,89E-06
Non-hazardous waste disposed, NHWD	kg	2,35E+00	9,76E-03	2,34E-01	MND	3,56E-01	MND	MND	MND	2,62E-04	1,65E-04	1,83E+01
Radioactive waste disposed, RWD	kg	1,73E-04	1,05E-04	4,01E-05	MND	5,77E-05	MND	MND	MND	1,02E-05	1,15E-06	1,87E-05
Output material for												
Components for reuse, CRU	kg	0,00E+00	0,00E+00	0,00E+00	MND	0,00E+00	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00
Materials for recycling, MFR	kg	1,28E+00	0,00E+00	1,22E-01	MND	0,00E+00	MND	MND	MND	0,00E+00	3,76E+00	0,00E+00
Materials for energy recovery, MER	kg	4,49E-04	0,00E+00	5,74E-02	MND	0,00E+00	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00
A1. Supply of raw materials												
A2. Transport												
A3 Manufacture according to figure 1)												
A4. Transport												
A5. Processes of installation and construction												
B1. Use												
B2. Maintenance												
B3. Repair												
B4. Replacement												
B5. Refurbishment												
B6. Operational energy use												
B7. Operational water use												
C1. Deconstruction and demolition												
C2. Transport												
C3. Waste management for reuse, recovery and recycling												
C4. Disposal												
MND. Non Declared Module												

3.5. Potential environmental benefits and impacts derived from activities of reuse, recovery and recycling

Table 5. Indicators of impact evaluation		
Reuse, recovery and recycling		
Parameter	Unit per m² of panel	D.
Abiotic Resources Depletion Potential (Elements)	kg Sb eq.	-1,80E-07
Abiotic Resources Depletion Potential (Fossil fuels)	MJ (net calorific value)	-2,28
Acidification Potential	kg SO ₂ eq.	-5,36E-04
Ozone Depletion Potential	kg CFC11 eq.	-2,08E-08
Global Warming Potential	kg CO ₂ eq.	-0,12
Eutrophication Potential	kg PO ₄₃ - eq	-1,86E-04
Photochemical Ozono Formation Potential	kg de C ₂ H ₄ eq.	-3,50E-05

D. Potential environmental benefits and impacts derived from activities of reuse, recovery and recycling

Table 6. Life cycle inventory data		
Use of resources, waste production and Reuse, recovery and recycling		
Parameter	Unit per m² of panel	D.
Total use of renewable primary energy resources, PERT	MJ	-5,51E-01
Total use of non-renewable primary energy resources, PENRT	MJ	-2,46E+00
Use of renewable secondary fuels, RSF	MJ	0,00E+00
Use of non-renewable secondary fuels, NRSF	MJ	0,00E+00
Net use of fresh water, FW	m ³	-6,42E-03
Waste production:		
Hazardous waste disposed, HWD	kg	-2,19E-06
Non-hazardous waste disposed, NHWD	kg	-8,93E-03
Radioactive waste disposed, RWD	kg	-6,98E-06
Output material for:		
Components for reuse, CRU	kg	0,00E+00
Materials for recycling, MFR	kg	0,00E+00
Materials for energy recovery, MER	kg	0,00E+00

D. Potential environmental benefits and impacts derived from activities of reuse, recovery and recycling

3.6. Recommendations of this DAP

Construction products should be compared by applying the same functional unit and level of building, i.e. including the product's behaviour throughout its life cycle.

Environmental product declarations of different Programs Operators of type III eco-labelling are not directly comparable, as the rules of calculation may be different.

This declaration represents the average behaviour of the Medium Porcelain Stoneware product manufactured CICOGRES.

3.7. Cut-off rules

Over 95% of all the inputs and outputs of mass and energy of the system have been included, excluding, among others, diffuse emissions in the factory.

3.8. Additional environmental information

The porcelain stoneware does not release hazardous substances in indoor air, soil and water during the use phase.

3.9. Other data

Waste from the ceramics industry is included as "non-hazardous waste" in the European List of Waste under LOW code 17 01 03 "tiles and ceramics" and EWC 17 01 07 "Mixtures of concrete, bricks, tiles and ceramics other than those mentioned in 17 01 06".

4. Technical information and scenarios

A) Transport

Parameter	Parameter expressed by functional unit
Consumption of fuel or transport vehicle used	17 tn truck: 1,19E-05 kg diesel/kgkm 27 tn truck: 1,25E-05 kg diesel/kgkm
Capacity of use (including return full)	85% for road transport and 100% for freighter
Density of load of product transported	1,490 kg/m ³
Factor for calculating the capacity of the volume used	1,260 kg/m ³ for a truck 1,490 kg/m ³ for a freighter

B) Processes of installation

Parameter	Parameter expressed by functional unit
Auxiliary materials for installation	Mortar: 3.5 kg
Consumption of other resources	0.875 kg of water
Quantitative description of the type of energy and consumption during the process of installing the product	Not detected
Waste on the construction site, generated by the installation of the product	<i>Spain:</i> Cardboard for incineration: 3,39E-03 kg Cardboard for recycling: 3,56E-02 kg Cardboard to landfill sites: 1,75E-02 kg Plastic for incineration: 8,63E-04 kg Plastic for recycling: 1,23E-03 kg Plastic for landfill sites: 4,07E-03 kg Pallet for incineration: 2,34E-02 kg Pallet for recycling: 2,19E-02 kg Pallet for landfill sites: 4,49E-03 kg

	<p><i>Europe:</i></p> <p>Cardboard for incineration: 5,66E-04 kg Cardboard for recycling: 2,09E-02 kg Cardboard to landfill sites: 6,79E-03 kg Plastic for incineration: 8,03E-04 kg Plastic for recycling: 8,33E-04 kg Plastic for landfill sites: 1,45E-03 kg Pallet for incineration: 4,99E-03 kg Pallet for recycling: 9,48E-03 kg Pallet for landfill sites: 1,05E-02 kg</p> <p><i>World:</i></p> <p>Cardboard for incineration: 1,17E-02 kg Cardboard for recycling: 5,87E-03 kg Cardboard to landfill sites: 4,11E-02 kg Plastic for incineration: 1,28E-03 kg Plastic for recycling: 6,40E-04 kg Plastic for landfill sites: 4,48E-03 kg Pallet for incineration: 1,04E-02 kg Pallet for recycling: 2,59E-02 kg Pallet for landfill sites: 1,55E-02 kg</p>
Material output as a result of the processes of waste management in the place of installation. For example: collection for recycling, for energy recovery and disposal	See previous point, "Waste on the construction site, generated by the installation of the product"
Emissions to the air, land and water	Not detected

C) Operational use of energy and water

Parameter	Parameter expressed by functional unit
Type of energy, for example: electricity, natural gas, use of heat for a district	Not detected
Outputs	Not detected
Net consumption of fresh water	Not detected
Service life (reference)	50 years

D) Maintenance and repair

Parameter	Parameter expressed by functional unit
Maintenance, for example; cleaning agent, type of surfactant	Quantities for cleaning 1 m ² (once)= - 0.00006 kg detergent - 0.1 kg water
Maintenance cycle	Cleaning for residential use = once/week* 52 weeks/year* 50 years =2600 washes
Energy input for the maintenance process	Not detected
Net consumption of fresh water during maintenance or repair	0.260 m ³

Inspection, maintenance or repair process	Not detected
Inspection, maintenance or repair cycle	Not detected
Auxiliary materials, e.g. lubricant	Not detected
Changing of parts during product life cycle	Not detected
Energy input during maintenance, type of energy, e.g.: electricity, and amount	Not detected
Energy input during the process of repair, renovation, changing parts if applicable and significant	Not detected
Loss of material during maintenance or repair	Not detected
Service life of the product for inclusion as a basis to calculate the number of times a change is needed in the building	50 years

E) End of life



Parameter	Parameter expressed by functional unit
Collection processes	22,10 kg collected together with construction waste
Recycling systems	3,76 kg
Disposal	18,34 kg of material for disposal including loss of material.

5. Additional information

Technical characteristics of the product	<ul style="list-style-type: none"> - CE marking - Euroclass reaction to fire: A1 / A1fl - Breaking strength: Group BIa > 1300 N - Water absorption: Group BIa E ≤0,5%
Transport and construction	<ul style="list-style-type: none"> - Density of load transported: 1,490 Kg/m³ - Mortar: 3.5 kg
Use and maintenance	<ul style="list-style-type: none"> - Useful life (years): 50 - Maintenance and cleaning recommendations: use 0.1 kg water/wash and 0.0006 kg detergent. Frequency of washing indicated is once a week.
End of life	<ul style="list-style-type: none"> - LOW code according to European List of Waste (Directive 2000/532/EC): LOW 17 01 03 "tiles and ceramics" and LOW 17 01 07 "Mixtures of concrete, bricks, tiles and ceramics other than those mentioned in 17 01 06"

6. PCR and verification

This declaration is based on the document RCP 002 Productos de revestimiento cerámico - Versión 2 - 2015.09.18.

<i>RCP 002- Productos de revestimiento cerámico V.2.</i> was revised by the Advisory Board of the DAPconstrucción® Program Operator.		
Independent verification of the declaration and data, in accordance with standards ISO 14025 and UNE EN 15804 + A1 <input type="checkbox"/> internal <input checked="" type="checkbox"/> external		
Third-party verifier: - Ferran Pérez Ibáñez	 Oficina d'Accreditació d'Entitats Col·laboradores Verificació VEDAP-001-10	
Date of verification: 2017, 29th october		

References

- ANÁLISIS DE CICLO DE VIDA DE LOS PRODUCTOS: GRES PORCELÁNICO MEDIO. CICOGRES, S.A. ReMa-INGENIERÍA, S.L. 2017 (not published)

ADMINISTRATOR OF PROGRAM OPERATOR

Col·legi d'Aparelladors, Arquitectes Tècnics i Enginyers de l'Edificació de Barcelona (CAATEEB)

Bon Pastor 5, 08021 Barcelona.

www.apabcn.cat

